




전자제어식 패턴 재봉기/Electronically Controlled Pattern Sewing Machine


SPS/A-1306HS

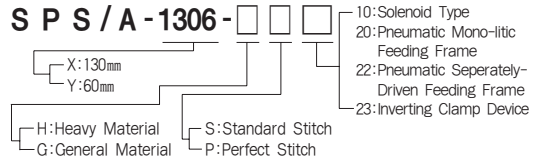

Stitch Type	1-Needle, Lock Stitch
Sewing Speed	Max. 2,500spm(For Stitch Length Of 3mm or Less)
Stitch Length	0.1~12.7mm
Height of Presser Foot	20mm
Stroke of Presser Foot	4~7mm
Feeding Frame Lift	Max. 25mm
Feeding System	Pulse Motor Drive(1Pulse 0.1mm)
Needle	DPx17 #18(For Medium-Heavy Weight Material)

Hook	Large Shuttle Hook
Memory	2DD/2HD, 3.5 inch Floppy Disk
Number of Stitches	Max. 360,000 Stitches(Max. 20,000 Stitches/1Pattern)
Number of Pattern	Max. 691 Patterns
Safety Devices	Emergency Stop, Error Code Indication
Sewing M/C Motor	550W AC Servo Motor
Power Source	1-Phase 220V, 240V, 380V, 400V
	3-Phase 220V, 380V, 415V

전자제어식 바택 재봉기/Electronically Controlled Bartacking Sewing Machine SPS/A-B1201(H)

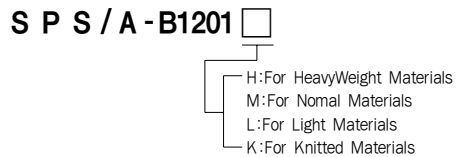

Sewing Area	40 × 20mm
Stitch Type	Lock Stitch
Sewing Speed	Max. 2,700s.p.m
Stitch Length	0.1 ~ 10mm
Height of Presser Foot	Max. 17mm
Thread Trimmer	★
Wiper	★
Feeding System	Pulse Motor Drive(1Pulse 0.1mm)

Hook	Standard Shuttle Hook
Memory	P-ROM
Number of Stitches	Max. 10,000 Stitches
Number of Patterns	Max. 99 patterns(Standard:32 attern)
Enlarging/Reducing	20%~200%(1%Step)
Sewing M/C Motor	550W AC Servo Motor
Power Supply	1-Phase 100~120V, 200~440V
	3-Phase 200~440